



RL-V-001

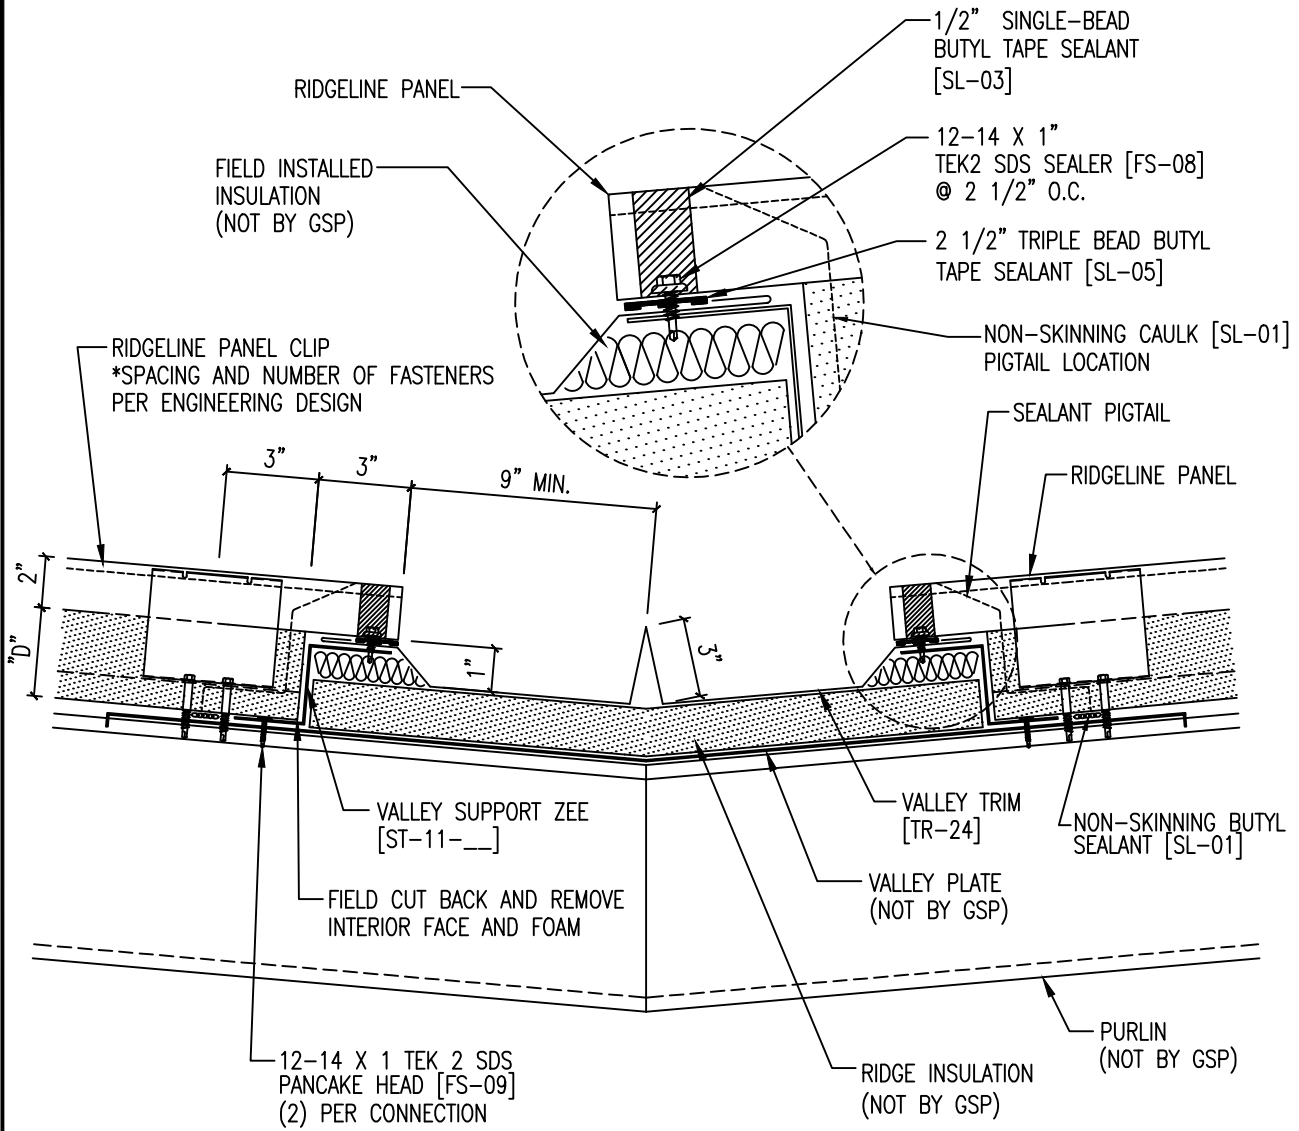

NOTES:

1. "D" = ROOF PANEL THICKNESS (AVAILABLE THICKNESS = 2.5, 3, 4, 5, OR 6)
2. FILLER INSULATION MATERIAL AND APPLICATION IS SPECIFIED BY THE PROJECT DESIGNER.
3. VALLEY CONDITIONS ARE NOT RECOMMENDED FOR APPLICATIONS WITH ROOF PITCH LESS THAN 3:12.
4. THE VALLEY PAN WIDTH VARIES WITH THE ROOF'S DRAINAGE REQUIREMENTS.
5. RECOMMENDED VALLEY PAN IS 16 GA. MIN. STEEL, WELDED WATER-TIGHT AND COATED OR LINED WITH MEMBRANE.

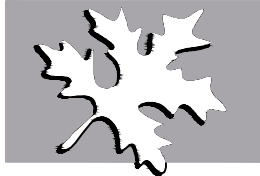

**GREEN SPAN
PROFILES®**
INSULATED PANEL TECHNOLOGIES

VALLEY

| | | | |
|----------------------------------|----------------|---------------------------|--|
| APPLICATION: ROOF | | NOTES: | |
| SCALE: NTS | REVISION: 3 | DATE: 6-3-16 | |
| DRAWN: JC | DATE: 10-20-13 | | |
| CHECK: | DATE: | | |
| 21200 FM362, WALLER, TEXAS 77484 | 281-807-7400 | WWW.GREENSPANPROFILES.COM | |