


3/8" UNIFORM BEAD OF NON-SKINNING BUTYL SEALANT MUST BE APPLIED IN THE EXTERIOR FEMALE GROOVE. APPLYING SEALANT IN THE INTERIOR FEMALE GROOVE IS OPTIONAL DEPENDING ON VAPOR SEAL REQUIREMENTS

\*\* THE DETAIL SHOWN IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE REFERENCE [WWW.GREENSPANPROFILES.COM](http://WWW.GREENSPANPROFILES.COM) FOR THE MOST CURRENT DATA \*\*

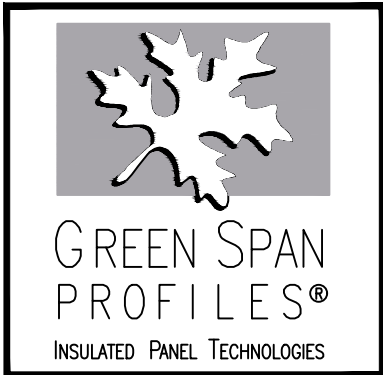

WALL PANEL SIDELAP		
APPLICATION: HORIZONTAL	NOTES: STANDARD TRIM	
SCALE: NTS	REVISION: 2	DATE: 3-21-23
DRAWN: DG	DATE: 9-20-13	
CHECK:	DATE:	
21200 FM362, WALLER, TEXAS 77484	281-807-7400	<a href="http://WWW.GREENSPANPROFILES.COM">WWW.GREENSPANPROFILES.COM</a>